

Features:

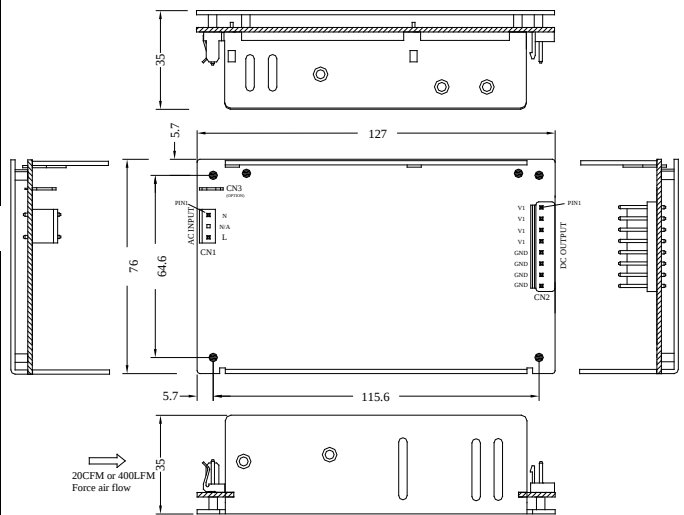
- ◆ High Density, High Efficiency > 90%
- ◆ Mini. Size, Low Profile 3" x 5" x 1.5"
- ◆ Low Leakage Current < 750uA @ 230Vac
- ◆ Safety Compliant With UL60950
- ◆ 12Vaux For External Fan Cooling(Optional)
- ◆ OCP , OVP , OTP Protection
- ◆ High Power 200W/Convection , 300W/20CFM Air

Application:

POE , POS , LCD TV
Industrial Equipment
Gaming Machine


Safety Certified:**Typical Mechanical Drawing :****WP213F11-12 (Connector code→AD)**

Case dimension (L*W*H): 127*76*35 mm


**Input Connector (CN1) :**

MOLEX 09-65-2038 (5273 SERIES) or equivalent
Mates with (MOLEX 5239) or equivalent

Pin	Signal
1	N
2	N/A
3	L

**Input****Connector(CN3) :(Optional)**


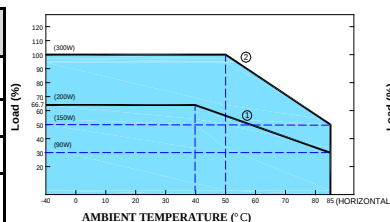

Safety ground pin→Quick Disconnect TAB,
6.35[0.250] X 0.81[0.032] (Molex(19705-4301)or
Equ).
The safety ground connection is provided by the
Quick Disconnect TAB near CN1.

**Output Connector (CN2) –9PIN:**

TKP PVH-08 or JWT A3963WV2-8P or Equ.
Mates with TKP HVH-XX Series or Equ.

Pin	Signal	Pin	Signal
1	V1	5	GND
2	V1	6	GND
3	V1	7	GND
4	V1	8	GND

V1=12V

**De-rating Curve****De-rating Curve A1 (Load VS Ambient)****De-rating Curve A2 (Load VS I/P Voltage)**

INPUT SPECIFICATIONS	
INPUT VOLTAGE	Universal Input : 90 ~ 264Vac
INPUT FREQUENCY	47 ~ 63Hz
INPUT CURRENT	4.9A/115Vac , 2.5A/230Vac
INRUSH CURRENT (Typ.)	100A/230Vac half cycle cold start
POWER FACTOR (Typ.)	PF > 0.95 / full load
EFFICIENCY (Typ.)	90%
LEAKAGE CURRENT	Leakage current < 750uA/230Vac

OUTPUT SPECIFICATIONS	
VOLTAGE	+12V
RATED LOAD(Convection)	0 ~ 16.6A
Max. LOAD(W/20CFM Airflow or Fan)	25A
RIPPLE & NOISE	120mV
REGULATION	±3%
Max. POWER	200W / 300W

PROTECTION SPECIFICATIONS	
OCP: (Over Load Protection)	150 ~ 200%
OVP: (Over Voltage Protection)	13.2 ~ 15.6V
OTP: (Over Temp. Protection)	Shut down O/P voltage

GENERAL SPECIFICATIONS	
HOLD UP TIME (Typ.)	≥16mS @ 115V
REMOTE CONTROL	N/A
DC OK SIGNAL	Led.
12Vaux For External Fan(Optional)	F11-NFW/o 12Vaux, F11-VFwith 12Vaux. @ 1A
COOLING	Convection/200W, 20CFM for 300W

SAFETY & ENVIRONMENTAL SPECIFICATIONS	
SAFETY APPROVALS REQUIRED :	UL , cUL , CE , FCC , CB
SAFETY STANDARDS	UL 60950-1 2nd , EN 60950-1
EMC EMISSION	EN55022(CISPR22) & FCC Class B.
OPERATING AMBIENT TEMP.	(-40) -20 ~ 85°C (note 1) (note 1: -40°C start up condition, o/p ≤ 200W)